


Modular Level4 DCFC: 100,150, 200 KW Single Dispenser System (North Am Version)

Power Engine Cabinet Model	EVP-FC100	EVP-FC150	EVP-FC200
Power Rating	100 KW	150 KW	200 KW
# of Power Engines	2	3	4
Input Power	480VAC-3P@120A	480VAC-3P@180A	480VAC-3P@240A
Input Power Breaker	3 phase x 200A	3 phase x 250A	3 phase x 300A
Efficiency Rating	>95%		
Max. Out DC Current (1KV)	126A	189A	250A
Max. Out DC Current (.5KV)	250A	378A	500A
Max. Output DC Voltage	50-1000VDC		
Dimension // Weight	42"W x 36"D x 82"H: 900/1100/1200 lbs		

350 KW Rated Dispenser EVDSP-FC-350-001	
Power Rating	350kW
Connectors	SAE CCS-1 Water Cooled & CHAdeMO
Network	OCPP 1.5/1.6, EVConnect, GreenLots, EVGo, BTCPower
Output Power	350KW Max
Input Power	350KW Max
Efficiency Rating	>99%
Max. Output DC Current	CCS1: 500A CHAdeMO: 250A
Max. Output DC Voltage	50-1000 VDC
Plug-Out Detection	Power terminated per SAE J1772 or CHAdeMO
Dimension // Weight	22"W x 12"D x 97"H // 600 lbs

Environmental and Compliance	
Ambient Condition	-20°C to +50°C, 95% humidity, 6000ft altitude. NEMA 4
Safety Compliance	ETL Listed for USA & Canada; Complies with UL 2594, UL 2231-1, UL2231-2, NEC Article 625, ADA Compliant

- High Voltage High Power DCFC
 - Transit Bus EV
 - Class 8 EV
- Optional Single Port CCS-1

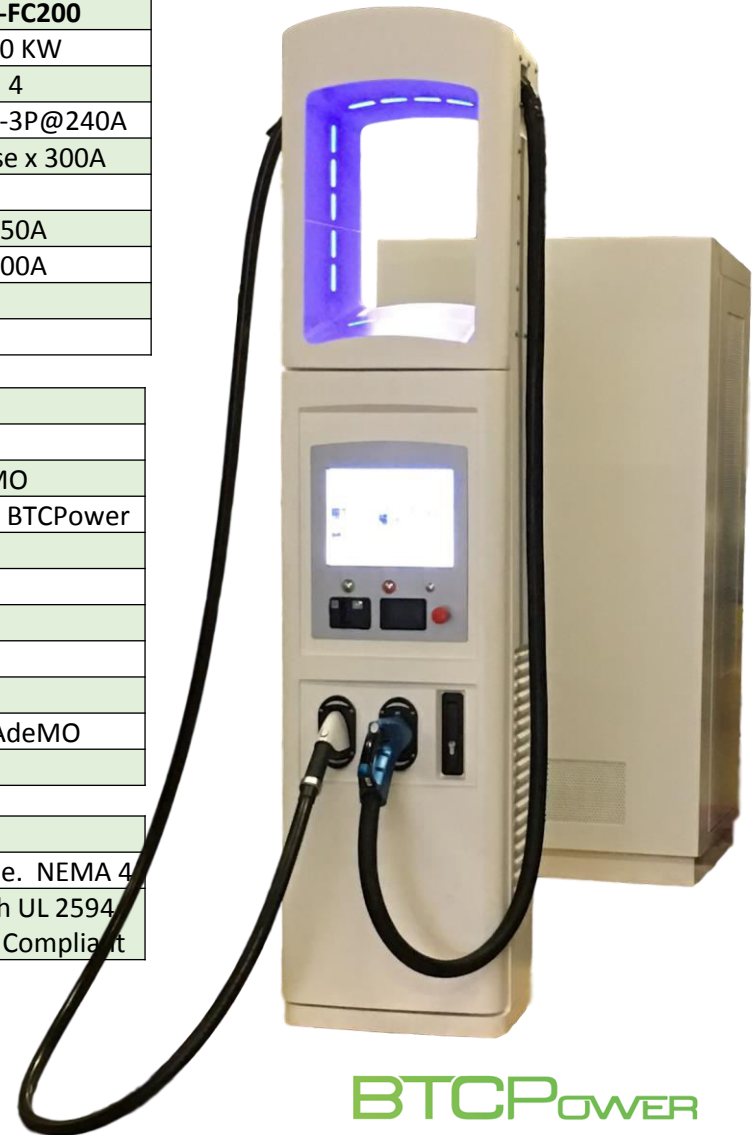

BTCPower

WWW.BTCPower.COM

1719 S Grand Ave Santa Ana CA, 92705


Modular Level4 DCFC: 100,150, 200 KW Single Dispenser System (EU Version)

Power Engine Cabinet Model	EVP-FC100	EVP-FC150	EVP-FC200
Power Rating	100 KW	150 KW	200 KW
# of Power Engines	2	3	4
Input Power	400VAC-3P@145A	400VAC-3P@220A	400VAC-3P@290A
Input Power Breaker	3 phase x 200A	3 phase x 300A	3 phase x 400A
Efficiency Rating	>95%		
Max. Out DC Current (1KV)	126A	189A	250A
Max. Out DC Current (.5KV)	250A	378A	500A
Max. Output DC Voltage	50-1000VDC		
Dimension // Weight	42"W x 36"D x 82"H: 900/1100/1200 lbs		

350 KW Rated Dispenser EVDSP-FC-350-001	
Power Rating	350kW
Connectors	SAE CCS-2 Water Cooled & CHAdeMO
Network	OCPP 1.5/1.6, EVConnect, GreenLots, EVGo, BTCPower
Output Power	350KW Max
Input Power	350KW Max
Efficiency Rating	>99%
Max. Output DC Current	CCS2: 500A CHAdeMO: 250A
Max. Output DC Voltage	50-1000 VDC
Plug-Out Detection	Power terminated per IEC61851-23 or CHAdeMO
Dimension // Weight	22"W x 12"D x 97"H // 600 lbs

Environmental and Compliance	
Ambient Condition	-20°C to +50°C, 95% humidity, 6000ft altitude. NEMA 4
Safety Compliance	IEC 62196, IEC 61851, CE
EMC	EN55011, EN55022, IEC61000-4

- High Voltage High Power DCFC
 - Transit Bus EV
 - Class 8 EV
- Optional Single Port CCS-1

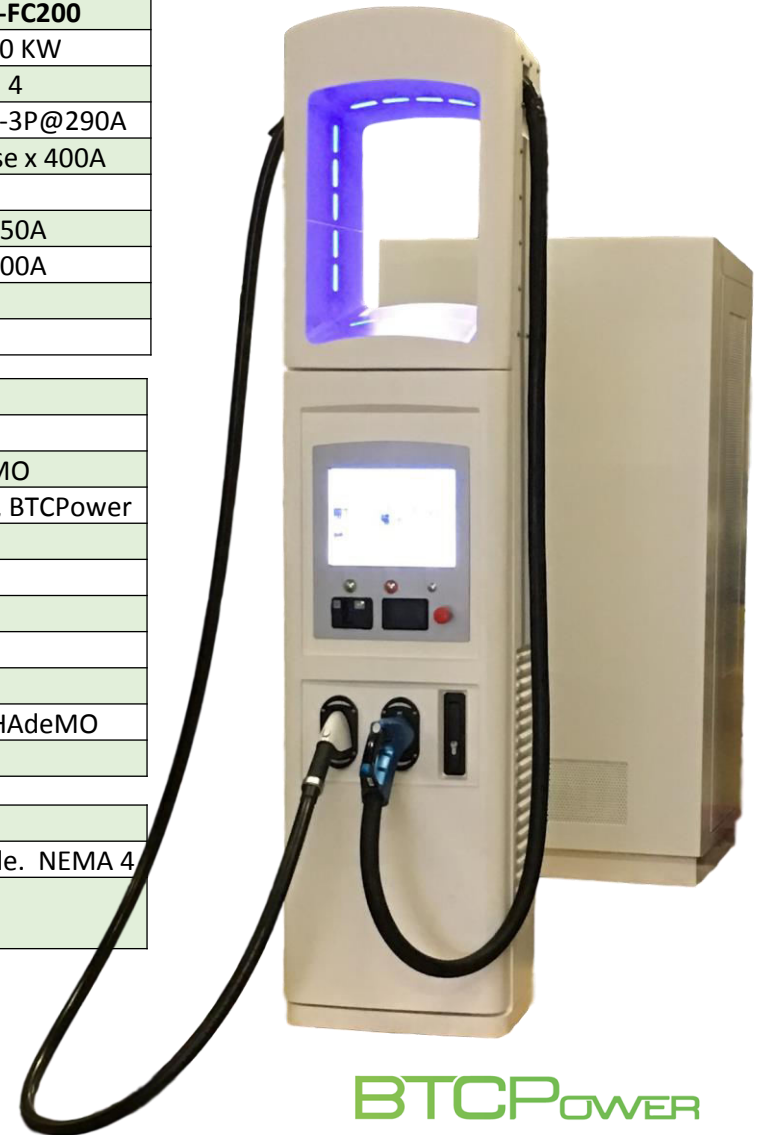

BTCPOWER

WWW.BTCPower.COM

1719 S Grand Ave Santa Ana CA, 92705